



## SWISCO SUPERIOR

### 48M AZIMUTH ANCHOR HANDLING TU

#### GENERAL DATA

Length	48.00 m
Breadth	12.80 m
Depth / Draft	5.06m/4.20m
GRT / NRT	884 / 265 Tons
Registry	Kingstown
Built	2008
Official Number	12560
Call Sign	J8B6087
IMO Number	9465631
Classification	Bureau Veritas
Bollard Pull	57 tons

#### MAIN ENGINE / GENERATOR

Main Engine	2 x Caterpillar 3516B 2375 bhp @ 1600 rpm
Main Generator	3 x Caterpillar 3406 C @ 245 kW 50 Hz/415V/245KW
Bow Thruster	HRP - 5 tons @ 300 kW
Propulsion	HRP steerable thrusters
Emergency Genset	1 x MANS @ 50 kW
Max Speed	12 knots

#### DECK EQUIPMENT

Special Machinery	WELL TEST
Work Boat	1 Deck Boat Cradle
Anchor Windlass	Hydraulic windlass - 5 tons
Anchor	AC - 14 HHP Anchor, 2 x 1,080kg
Stern Roller	3.5m x 1.5m, 200 tons SWL
Wire Rope	Tow wire : 600m x 52mm Work wire : 150m x 52mm
Capstan	2 x 5 tons @ 15 m / min
Towpin	200 tons SWL
Crane	1.5 tons SWL @ 25 m

#### SAFETY EQUIPMENT

Fire Fighting	2 x 600m <sup>3</sup> / hr monitors
Engine Room	CO2 flooding system
Life Raft	4 x 25 men self-inflatable
Life Jacket Fireman	30 men
Outfit Rescue Boat	4 1 x 6 men

#### NAVIGATION / COMMUNICATION EQUIPMENT

Radar	1 x JRC - 48 Nm / 96 Nm JRC & 1 KODEN
Echo Sounder	2 x JRC JFE - 582
GPS	2 x Samyung & 1 Furuno
Auto Pilot	HRP
Compass	Saura - magnetic compass Yokogawa Gyrocompass
Inmarsat C	Fitted
SSB	JRC JSS 296
VHF	1 x JRC JHS-32B 1 x Sailor
ECDIS	1 SIMRAD
EPIRB	McMurdo E3
SART	2 units NCR
Search Light	2 x 2.000 W
PA System	1 Unit
Speed Log	JCR JLN - 205

#### TANK CAPACITY

Fuel Oil	684.406 m <sup>3</sup>
Fresh Water	254.725 m <sup>3</sup>
Lube Oil	5.039 m <sup>3</sup>
Hydraulic Oil	5.041 m <sup>3</sup>
Ballast	122.185 m <sup>3</sup>
Foam	9.264 m <sup>3</sup>
Detergent	15.448 m <sup>3</sup>

#### ACCOMMODATION

Single Cabin	4 units
Twin Cabin	2 units
4 Men Cabin	4 units
Total	24 men


#### OTHER INFORMATION

Deck Space	21.4 m x 10.6 m = 227 m <sup>2</sup>
Deck Strength	5 tons / m <sup>2</sup>



## SWISSCO SUPERIOR

48M AZIMUTH ANCHOR HANDLING TU

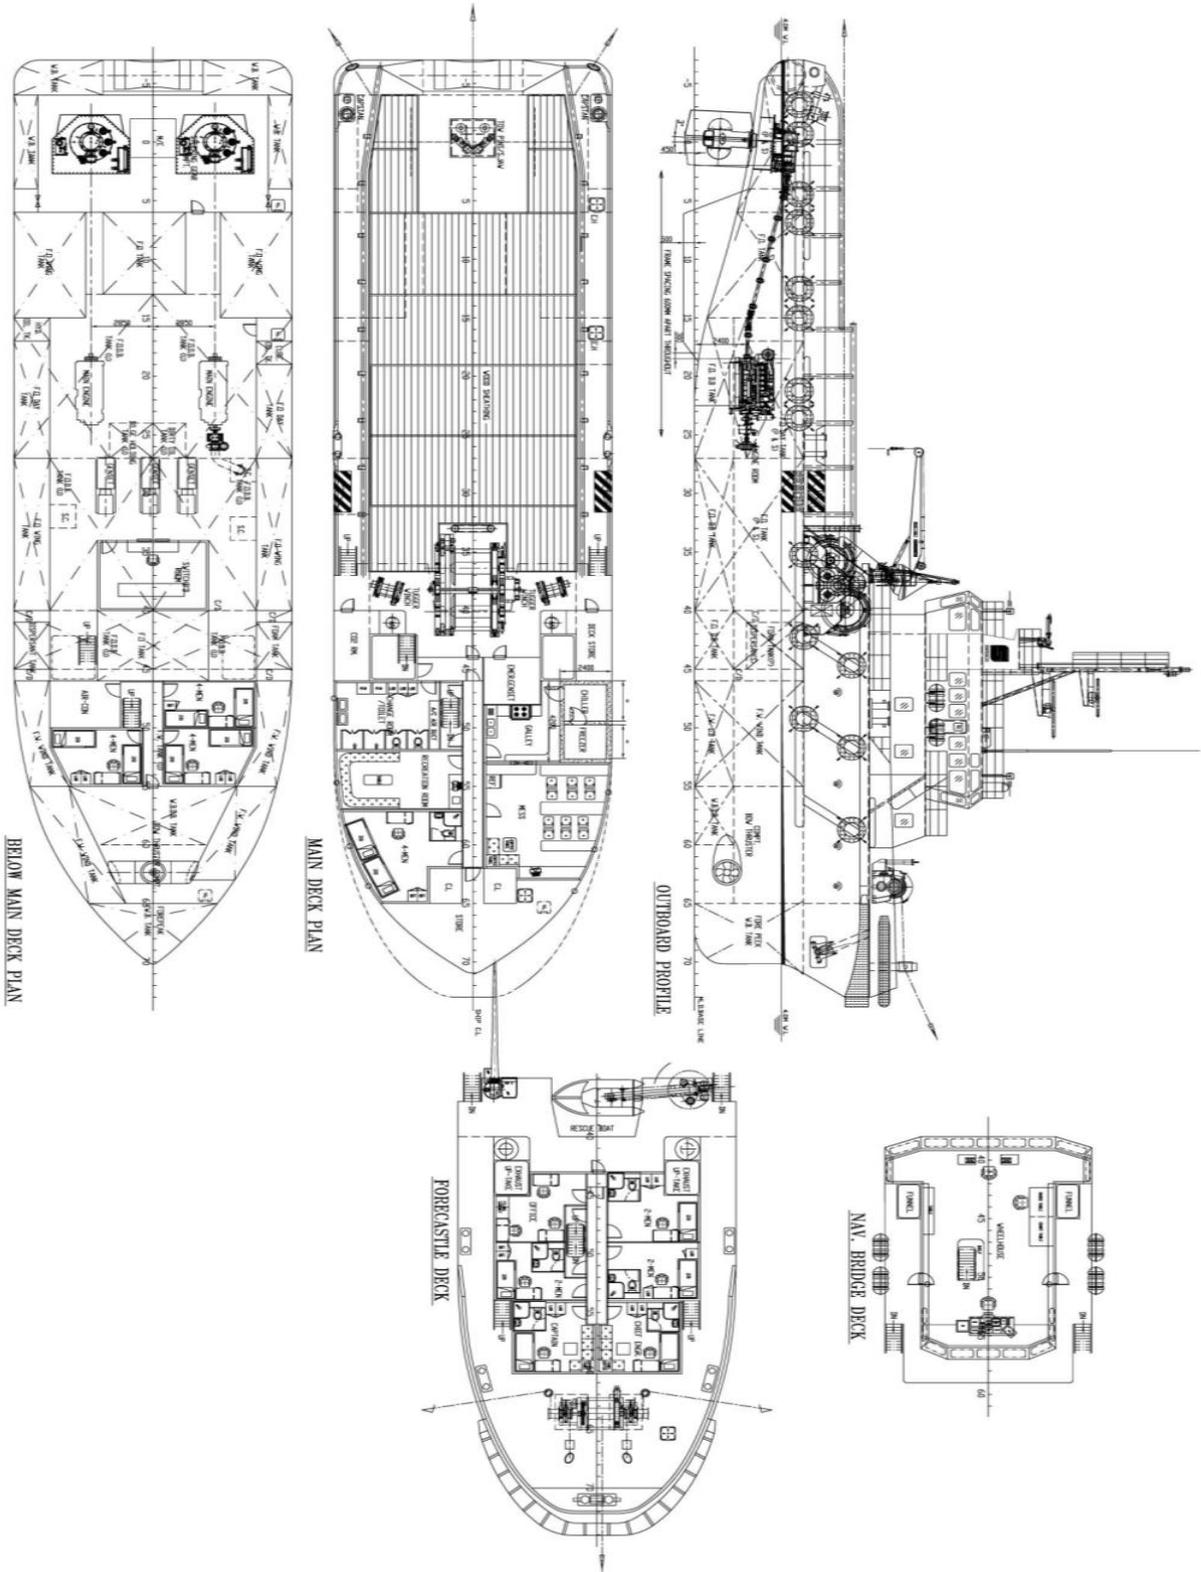

\*Particulars are believed to be correct but not guaranteed. All figures given are approximate only. Owners reserve the right to amend the specifications without notification.